



MSV series MSV-300



Valve Regulated Lead Acid Battery

Maintenance-Free Sealed Lead Acid Battery.
Absorbent Glass Mat (AGM) technology for efficient gas recombination of up to 99%.

General Design for Standby Power Applications

【Design Life】

Up to 15 Years in Standby Service at 25°C
Eurobat (20°C) : >12 YEARS VERY LONG LIFE

【Operating Temperature Range】

Nominal Operating Temperature : 25°C (77°F)
Discharge : -15°C ~ 50°C (5°F~122°F)
Charge: -15°C ~ 40°C (5°F~104°F)
Storage: -15°C ~ 40°C (5°F~104°F)

【Float Charging Voltage】

2.21 ~ 2.25 VDC/Unit at 25°C (77°F)

【Equalization Charging Voltage】


2.35 VDC/Unit at 25°C (77°F)

【Self Discharge】

Less than 10% after 90 days, can be stored up to 6 months at 25°C (77°F);
Fully recharging is required before usage, and charged sooner if stored at higher temperature than 25°C (77°F).

Specification

Nominal Voltage	2V (single cell per unit)		
Nominal Capacity	300 Ah @10hr-rate to 1.80V per cell @25°C (77°F)		
Weight	Approx. 18.20 Kg (40.11 lbs)		
Maximum Discharge Current	1800 A (5sec)		
Internal Resistance	Approx. 0.54 mΩ		
Short Circuit Current	3600A		
Maximum Charge Current	90 A		
Terminal types	I4 thread copper alloy terminal to accept M8 bolt		
Terminal tightening torque	126±25 Kg·cm / 109±22 Lbf·in / 12.3±2.5 N·m		
Container Material	Flame Retardant ABS (UL 94-V0)		
Dimensions	Length (L)	170.0±2.0 mm	6.69±0.08 inch
	Width (W)	150.0±1.5 mm	5.91±0.06 inch
	Container height (h)	331.0±2.5 mm	13.03±0.10
	Overall Height (H)	339.0±2.5 mm	13.15±0.10 inch

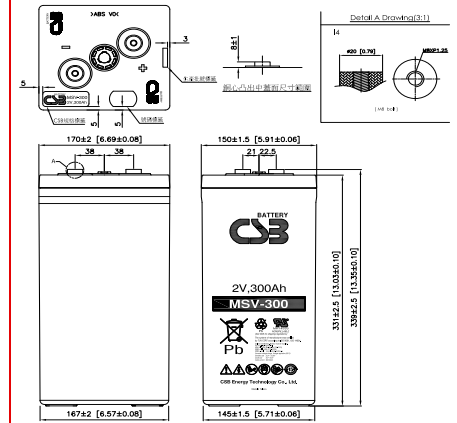

Constant Current Discharge Characteristics Unit: A (25°C, 77°F)

F.V/Time	15MIN	30MIN	60MIN	2HR	2.5HR	3HR	5HR	6HR	8HR	10HR	20HR	24HR
1.60V	427	294	194	115	98.2	86.3	57.8	50.3	39.8	33.8	16.9	14.1
1.67V	389	280	185	111	93.8	81.8	55.5	48.0	39.0	33.0	16.5	13.8
1.70V	362	273	182	109	92.6	81.0	54.8	47.3	38.3	32.3	16.2	13.5
1.75V	316	252	168	103	87.0	75.8	51.8	45.0	36.8	30.8	15.4	12.8
1.80V	274	220	158	99.0	83.6	72.8	50.3	44.3	36.0	30.0	15.0	12.5
1.83V	238	195	146	93.0	79.4	69.8	48.0	42.0	34.2	29.3	14.7	12.2

Constant Power Discharge Characteristics Unit: W (25°C, 77°F)

F.V/Time	15MIN	30MIN	60MIN	2HR	2.5HR	3HR	5HR	6HR	8HR	10HR	20HR	24HR
1.60V	700	517	346	208	178	156	106	93.0	75.0	63.0	31.5	26.3
1.67V	640	494	345	206	176	154	105	92.3	74.3	62.3	31.2	26.0
1.70V	610	479	334	202	172	151	104	90.8	72.8	61.5	30.8	25.6
1.75V	552	447	312	193	165	145	100	87.0	71.3	60.0	30.0	25.0
1.80V	504	400	294	185	158	139	96.8	84.8	69.0	59.3	29.7	24.7
1.83V	429	347	271	174	150	133	92.3	81.0	66.0	57.0	28.5	23.8

Please refer to the official site for the latest rating confirmation. URL: www.csb-battery.cn

Issued: 201112

Sales Offices

希世比能源科技股份有限公司
CSB Energy Technology Co., Ltd.

BUSINESS HEADQUARTERS

Tel: +886-2-2880-5600
Fax: +886-2-2888-3300

USA OFFICE

Tel: +1-817-244-7777 / 1-(800)3-CSB-USA (272872)
Fax: +1-817-244-4445

EUROPE (EMEA) OFFICE

Tel: +31(0)180-418-140
Fax: +31(0)180-418-327

Recognized under UL 1989,
and certified by ISO 9001, 14001, 45001, 50001.



TAIPEI OFFICE

Tel: +886-2-2880-5600
Fax: +886-2-2888-3300